



OP-11



OP-12




OP-01 ~ OP-07

FEATURE

- ◆ Big size FSTN LCD and LED backlight
- ◆ Convenient use of batch weighing
- ◆ Possible to compare and check weight date in 3-steps(LO, OK, HI)
- ◆ Accumulate and count weight data
- ◆ Average hold and peak hold functions
- ◆ 12 Multiple Options

CASE	12 Multi option	01	02	03	04	05	06	07	08	09	10	11	12
Case 1	01 3 Solid state relay and input	X						X	O		O		O
Case 2	02 RS232C	O	X	X	X	X	X	X	O		O		O
Case 3	03 RS422, 485	O	X	X	X	X	X	X	O		O		O
Case 4	04 Analog output (0~10V, 4~20mA)	O	X	X	X	X	X	X	O		O		O
Case 5	05 Current loop output	O	X	X	X	X	X	X	O		O		O
Case 6	06 LAN IEEE 802.3	O	X	X	X	X	X	X	O		O		O
Case 7	07 BCD output	X	X	X	X	X	X	X	O		O		O
08	USB host								X		O		O
09	ZigBee wireless				O				O	X	X	X	O
10	Bluetooth wireless				O				O	X	X	X	O
11	Rechargeable Li-Po battery pack				O				O	X	X	X	O
12	Steel & powder painting mount bracket				O				O		O		X

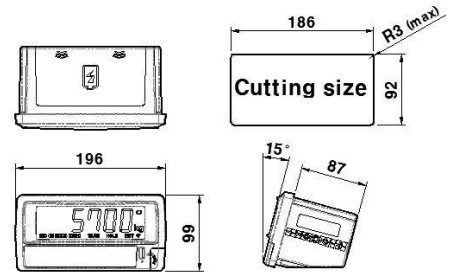

MODEL	TI-5700	MODEL	TI-5700
Display	6digit LCD (Height : 30mm) and Backlight	External resolution	Up to 100,000counts
Input sensitivity	0.2uV/D	Output data rate	4.7 to 200 measurements per second
Input signal range	0~39mV	Temperature range	-10°C ~ 40°C
Non linearity	±0.0015% of FSR max.	Operating time	200hr (1 Load Cell)
Load Cell excitation	DC 5V± 5%, 300mA (Up to 8 Unit of 350ohm)	Product weight	Approx. 700g
Effective resolution	24bit	Power	AC/DC Adaptor 12V, 1A