







IR controller (Standard)

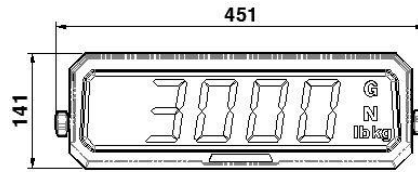

FEATURE

- ◆ Tilt and swivel mount bracket
- ◆ Water Proof : IP-65 ◆ IR Remote Controller

MODEL	TI-2300 / 3000	TI-2300C / 3000C	TD-2300F / 3000F	TD-2300 / 3000
Type	Weighing Indicator		Wireless remote display	Remote display
Display	5 digit 2.3inch FND (2300 series) / 5 digit 3inch FND (3000 series)			
Display lamp	5 lamps (zero, tare, hold, power, stable)			
Keypads	4 touch keys (zero, tare, hold, power on/off)			
Load cell connection	Up to 8 load cells (350ohm)		N/A	N/A
Input sensitivity	0.2uV/D			
AD conversion method	Sigma delta			
AD external resolution	1/50,000 (Max.)			
Update rate	20 update/sec. Adjustable		ZigBee	RS-232C / Current loop
Communication	RS-232C			
Case material	Engineering plastic			
Temperature range	-10°C ~40°C			
Product weight	1.2kg(2300 series) / Approx. 2.2kg(3000 series)			
Power	Adaptor DC 12V, 1A			
Parts	Power adaptor, IR remote controller			Power adaptor
External IO , RTC	N/A	2 solid state relay and 4 input, RTC	N/A	
Option 1	Use the vehicle power (12~24VDC)			
Option 2	ZigBee		Standard	N/A